


**Bellows expansion joint, type OPK**

An expansion joint consisting of a bellows and connection branch pipes further welded to a pipeline, with a mounted fixed non-load bearing casing.

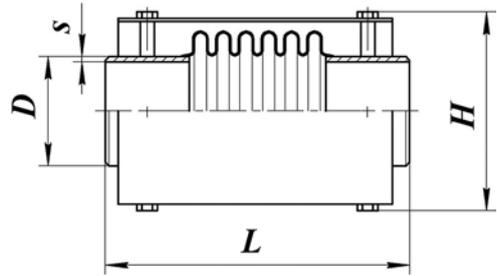

Reference designation	PN, MPa	DN, mm	Axial stroke $2\lambda-1$ , mm	Dimensions, mm				Weight, kg
				D	s	D <sub>1</sub>	L	
ОПК-16-50-80-2.2	1,6 (16)	50	80	57	4,0	175	382	6
ОПК-16-65-80-2.2		65	80	76	4,0	188	382	6
ОПК-16-80-90-2.2		80	90	89	4,0	201	396	6
ОПК-16-100-120-2.2		100	120	108	4,0	220	430	9
ОПК-16-125 м <sup>3</sup> 0-2.2		125	130	133	5,0	269	440	11
ОПК-16-150-150-2.2		150	150	159	6,0	303	463	12
ОПК-16-200-160-2.2		200	160	219	8,0	371	524	21
ОПК-16-250-180-2.2		250	180	273	7,0	429	645	37
ОПК-16-300-190-2.2		300	190	325	8,0	485	655	52
ОПК-16-350-190-1.2		350	190	377	9,0	528	664	50
ОПК-16-400-200-1.2		400	200	426	9,0	590	696	72
ОПК-16-500-210-1.3		500	210	530	8,0	702	682	102
ОПК-16-600-220-1.3		600	220	630	8,0	810	695	131
ОПК-16-700-220-1.3		700	220	720	8,0	900	698	163
ОПК-16-800-240-1.3		800	240	820	9,0	1020	726	184
ОПК-16-900-260-1.3		900	260	920	10,0	1124	704	222
ОПК-16-1000-260-1.3		1000	260	1020	12,0	1228	726	274
ОПК-16-1200-260-1.3		1200	260	1220	12,0	1428	726	375
ОПК-16-1400-260-1.3	1400	260	1420	12,0	1636	732	469	
ОПК-25-50-80-2.2	2,5 (25)	50	80	57	4,0	175	382	6
ОПК-25-65-80-2.2		65	80	76	4,0	188	382	6
ОПК-25-80-90-2.2		80	90	89	4,0	201	396	6
ОПК-25-100-120-2.2		100	120	108	4,0	220	430	9
ОПК-25-125-130-2.2		125	130	133	5,0	269	440	11
ОПК-25-150-150-2.2		150	150	159	6,0	303	463	12
ОПК-25-200-160-2.2		200	160	219	8,0	371	524	21
ОПК-25-250-180-2.2		250	180	273	7,0	429	645	37
ОПК-25-300-190-2.2		300	190	325	8,0	485	658	52
ОПК-25-350-190-1.2		350	190	377	9,0	528	684	59
ОПК-25-400-200-1.2		400	200	426	9,0	590	706	84
ОПК-25-500-210-1.3		500	210	530	8,0	702	692	112
ОПК-25-600-220-1.3		600	220	630	8,0	810	713	145
ОПК-25-700-220-1.3		700	220	720	8,0	900	714	176
ОПК-25-800-240-1.3		800	240	820	9,0	1020	743	212
ОПК-25-900-260-1.3		900	260	920	10,0	1124	719	258
ОПК-25-1000-260-1.3		1000	260	1020	12,0	1228	742	322
ОПК-25-1200-260-1.3		1200	260	1220	12,0	1428	770	435
ОПК-25-1400-260-1.3	1400	260	1420	12,0	1636	750	538	